


**Micro Processor Based Combination of
Centre Seal and Side Seal Pouch Making Machine
(Suitable for laminated film only)**



Over 350 Installations in India and abroad

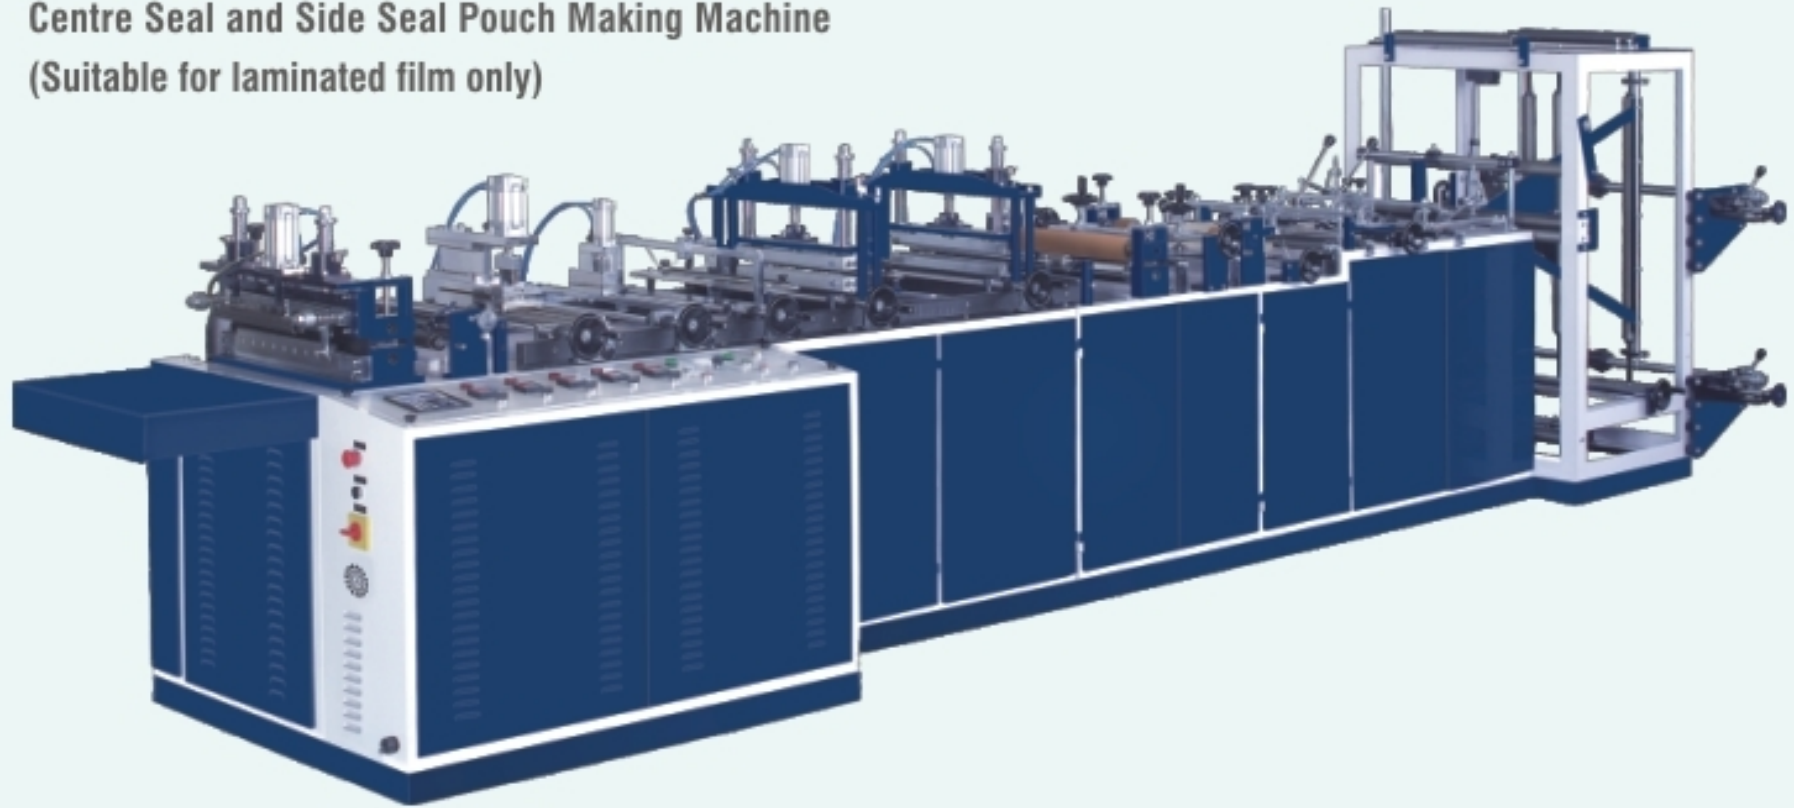

Micro Processor Based Combination of Centre Seal and Side Seal Pouch Making Machine (With SERVO and STEPPER Drive)

FUNCTIONAL PARAMETERS

PARTICULARS	MODEL		
	CMST-P-300 (Stepper) CMSV-P-300 (Servo)	CMST-P-400 (Stepper) CMSV-P-400 (Servo)	CMST-P-500 (Stepper) CMSV-P-500 (Servo)
Maximum Width of film (in mm) Single Roll Two Rolls	600 300	800 400	1000 500
Maximum Width of Pouch (in mm) Centre seal Side seal	290 300	390 400	490 500
Minimum Width of Pouch (in mm)	50	50	50
Maximum Lenth of Pouch (in mm) Minimum Length of Pouch (in mm)	500* 25	500* 25	500* 25
Maximum Speed of Machine (Pouches per Minute)	100-120**	100-120**	100-120**
Electric Heaters Centre seal (W) Side seal (W) Bottom Seal (W)	600x2 600x4 1000x4	600x2 600x4 1000x4	600x2 600x4 1200x4
DRIVE			
Stepper / Servo Draw Motor Indexing	DC/AC Stepper/Servo	DC/AC Stepper/Servo	DC/AC Stepper/Servo
Connected Load Stepper (KW) Servo (KW)	10 11 (3 Ph / 415 V)	10 11 (3 Ph / 415 V)	11 12 (3 Ph / 415 V)
Air Requirement Pressure Quantity	6 Kg 12-15 Cfm	6 Kg 12-15 Cfm	6 Kg 12-15 Cfm
Size of Machine (in mm)	6100 X 1500 X1800	6100 X 1600 X1800	6100 X 1700 X1800
Weight of the Machine (in Kg)	~ 1500	~1800	~2100

* Depends on no. of bottom sealing stations & attachments used.


** Depends on size of pouch & thickness of film.

Optional Attachments

D Punch



V Notch



Side Flap Insertion



Five Side Seal



Primo pack
Machines Pvt. Ltd.

Manufacturer & Exporter of Micro Processor Based Pouch Making Machines
C-1,50/2, G.I.D.C. Estate, Phase-III, Naroda, Ahmedabad-382330. INDIA
Telefax : +91- 79 - 22841684 / 22821896 Mobile : +919427608050 / +919825034534
E-mail : info@primopack.com Website : www.primopack.com